



jet.com.ua

EASTERN-EUROPEAN JOURNAL OF ENTERPRISE TECHNOLOGIES

ISSN 1729-3774



5/11 (113)
2021

information-technologies

інформаційні технології

информационные
технологии

new economy

нова економіка

НОВАЯ ЭКОНОМИКА

industrial applications

промислові технології

промышленные
технологии

- Technology and equipment of food production

5/11 (113) 2021

Content

TECHNOLOGY AND EQUIPMENT OF FOOD PRODUCTION

- 6 Design of an apparatus for low-temperature processing of meat delicacies
Andrii Zahorulko, Oleksander Cherevko, Aleksey Zagorulko, Marina Yancheva, Nina Budnyk,
Yuliya Nakonechna, Natalia Oliynyk, Nadia Novgorodska
- 13 Development of recommendations on the hierarchy of activities regarding the implementation of the
BRC standard in relation to the safety of packaging using the AHP method
Agnieszka Kawecka, Agnieszka Cholewa-Wójcik, Tadeusz Sikora
- 20 The study and scientific substantiation of critical control points in the life cycle of immunostimulating
products such as pastila and marmalade
Olga Belozertseva, Lyazzat Baibolova, Yuliya Pronina, Alberto Cepeda, Dinara Tlevlessova
- 29 Determining the effect of pH-shifting treatment on the solubility of pumpkin seed protein isolate
Dan Gao, Anna Helikh, Zhenhua Duan
- 35 Nutritional value of a dry soluble gerodietetic product for enteral nutrition
Dmytro Antiushko, Tetiana Bozhko, Nataliia Shapovalova, Mariia Fil, Tetiana Brovenko, Galina Tolok,
Artem Antonenko, Olga Gyrka, Mykhailo Bodak, Lubomyr Bezruchko
- 43 Improving marshmallow production technology by adding the fruit and vegetable paste obtained by low-
temperature concentration
Mariana Bondar, Alla Solomon, Fedak Natalia, Mariia Paska, Anna Hotvianska, Lyudmila Polozhshnikova,
Denys Mironov, Larisa Kushch
- 51 Determining the optimal parameters of ultra-high-frequency treatment of chickpeas for the production
of gluten-free flour
Aigul Omaraliyeva, Zhanar Botbayeva, Mereke Agedilova, Meruyert Abilova, Aidana Zhanaidarova
- 61 A study of the possibilities of using linseed flour and rice husk fiber as an additional source of raw
materials in the bakery industry
Zilikha Moldakulova, Meruyet Bayisbayeva, Galiya Iskakova, Fatima Dikhanbayeva, Assel Izembayeva,
Viera Sottnikova
- 73 Devising the formulation and technology for baking buns from flour of composite mixtures and sugar beet
Madina Yakiyayeva, Bayan Muldabekova, Rauan Mukhtarkhanova, Pernekul Maliktayeva,
Ainur Zheldybayeva, Galymzhan Nasrullin, Aigerim Toktarova
- 85 Development of an innovative technology for accelerated cooking of no yeast bread using ion-ozonized
water
Auyelbek Iztayev, Mariam Alimardanova, Baurzhan Iztayev, Mira Yerzhanova, Ulbala Tungyshbayeva,
Izteliyeva Raushan, Sholpan Tursunbayeva
- 97 Abstract&References

EDITOR IN CHIEF

Dennis Dimitry

Professor of the National Technical University «Kharkiv Polytechnic Institute»,
Director of PC TECHNOLOGY CENTER, Kharkiv (Ukraine)

Terziyan Vagan

Professor of the University of Jyväskylä (Finland)

EDITORIAL BOARD

ENGINEERING TECHNOLOGICAL SYSTEMS

Awrejcewicz Jan, Professor of Lodz University of Technology, Department of Automation, Biomechanics and Mechatronics, Lodz (Poland); **Kindrachuk Myroslav**, Professor of National Aviation University, Department of Tribological material science, powder metallurgy, functional materials, Kyiv (Ukraine); **Korzhyk Volodymyr**, Doctor of Technical Sciences, Director of the Chinese-Ukrainian E. O. Paton Welding Institute (CUPWI), Guangzhou (China); **Marcin Kamiński**, Professor of Lodz University of Technology, Department of Structural Mechanics, Lodz (Poland); **Ulusoğlu Ugur**, Professor of Cumhuriyet Universitesi, Department of Mining Engineering, Sivas (Turkey); **Shen Houfa**, Professor of Tsinghua University, School of Materials Science and Engineering, Beijing (China); **Zagirnyak Mykhaylo**, Professor of Kremenchuk Mykhailo Ostrohradskiy National University, Department of electric machines and apparatus, Kremenchuk (Ukraine); **Zaloga Viliam**, Professor of Sumy State University, Department of manufacturing engineering, machines and tools, Sumy (Ukraine)

INFORMATION TECHNOLOGY. INDUSTRY CONTROL SYSTEMS

Iyengar Sitharama Sitharama, Professor of Florida International University, School of Computing and Information Sciences, Miami (USA); **Jakob Frantisek**, Associate Professor of Technical University of Kosice, Department of Computers and Informatics, Kosice (Slovak Republic); **Lakhno Valeriy**, Professor of National University of Life and Environmental Sciences of Ukraine, Kyiv (Ukraine); **Lytvyn Vasyli**, Professor of Lviv Polytechnic National University, Department of Information Systems and Networks, Lviv (Ukraine); **Ostapov Serhii**, Professor of Yuri Fedkovych Chernivtsi National University, Department of Computer systems software, Chernivtsi (Ukraine); **Terziyan Vagan**, Professor of University of Jyväskylä, Department of Mathematical Information Technology, Jyväskylä (Finland); **Teslyuk Vasyli**, Professor of Lviv Polytechnic National University, Department of Automated Control Systems, Lviv (Ukraine); **Wrycza Stanislaw**, Professor of Uniwersytet Gdanski, Department of Business Informatics, Gdańsk (Poland); **Zholteyevych Grygoryi**, Professor of Karazin Kharkiv National University, Department of Theoretical and Applied Computer Science of School of Mathematics and Computer Science, Kharkiv (Ukraine)

CONTROL PROCESSES

Butko Tatiana, Professor of Ukrainian State University of Railway Transport, Department of operational work and international transportation, Kharkiv (Ukraine); **Demin Dmitriy**, Professor of National Technical University «Kharkiv Polytechnic Institute», director of the PC TECHNOLOGY CENTER, Kharkiv (Ukraine); **Gogunsky Viktor**, Professor of Odessa National Polytechnic University, Department of Management of life safety systems, Odessa (Ukraine); **Myamlin Sergey**, Professor of Dnipropetrovsk National University of Rail Transport, Dnipro (Ukraine); **Panchenko Sergii**, Professor of Ukrainian State University of Railway Transport, Department of Automatic and computer remote control of train traffic, Kharkiv (Ukraine); **Prokhorchenko Andrii**, Professor of Ukrainian State University of Railway Transport, Department of Operational Work Management, Kharkiv (Ukraine); **Rab Nawaz Lodhi**, PhD, COMSATS Institute of Information Technology Sahiwal Campus (Pakistan); **Sira Oksana**, Professor of National Technical University «Kharkiv Polytechnic Institute», Department of distributed information systems and cloud technologies, Kharkiv (Ukraine)

MATHEMATICS AND CYBERNETICS – APPLIED ASPECTS

Ahmad Izhar, Associate Professor of King Fahd University of Petroleum and Minerals, Department of Mathematics and Statistics, Dhahran (Saudi Arabia); **Atamanyuk Igor**, Professor Mykolaiv National Agrarian University, Department of Higher and Applied Mathematics, Mykolaiv (Ukraine); **Hari Mohan Srivastava**, Professor University of Victoria, Department of Mathematics and Statistics, Victoria (Canada); **Kanellopoulos Dimitris**, PhD, University of Patras, Department of Mathematics, Patra (Greece); **Kondratenko Yuriy**, Professor Petro Mohyla Black Sea National University, Department of Intelligent Information Systems, Mykolaiv (Ukraine); **Romanova Tetyana**, Professor Institute for Problems in Machinery of National Academy of Sciences of Ukraine, Department of Mathematical Modeling and Optimal Design, Kharkiv (Ukraine); **Savanevych Vadym**, Professor State Space Agency of Ukraine, Kyiv (Ukraine); **Trujillo Juan J.**, Professor of Universidad de la Laguna, Faculty of Mathematics, San Cristobal de La Laguna (Spain); **Weber Gerhard Wilhelm**, Professor of Middle East Technical University, Institute of Applied Mathematics, Ankara (Turkey)

APPLIED PHYSICS

Bobitski Yaroslav, Professor of University of Rzeszow, Department of mechatronics, Rzeszow (Poland); **Glamazdin Alexander**, PhD, National Science Center «Kharkov Institute of Physics and Technology», Kharkiv (Ukraine); **Grishanov Nikolay**, Professor of Ukrainian State University of Railway Transport, Department of Physics of plasmas, Controlled Nuclear Fusion, Kharkiv (Ukraine); **Ilchuk Hryhoriy**, Professor of Lviv Polytechnic National University, Department of General Physics, Lviv (Ukraine); **Machado Jose Antonio Tenreiro**, Professor of Polytechnic of Porto, Institute of Engineering, Department of Electrical Engineering, (Portugal); **Magafas Lykourgos**, Professor of Eastern Macedonia & Thrace Institute of Technology, Department of Electrical Engineering (Greece); **Maryanchuk Pavlo**, Professor of Yuriy Fedkovych Chernivtsi National University, Department of Physics, (Ukraine); **Maslov Volodymyr**, Professor of National Technical University of Ukraine «Igor Sikorsky Kyiv Polytechnic Institute», Department of Scientific, analytic and ecological instruments and systems, Kyiv (Ukraine); **Mohammad Mehdi Rashidi**, Professor of Tongji University, Shanghai (China); **Nerukh Dmitry**, Senior Lecturer Aston University, Department of Mathematics, Birmingham, United Kingdom; **Pavlenko Anatoliy**, Professor of Kielce University of Technology, Department of Building Physics and Renewable Energy, Kielce (Poland); **Starikov Vadim**, Associate Professor of National Technical University «Kharkiv Polytechnic Institute», Department of Physics of metals and semiconductors, Kharkiv (Ukraine); **Tkachenko Viktor**, Professor of V. N. Karazin Kharkiv National University, Department of Physics of Innovative Energy & Technology & Ecology, Kharkiv (Ukraine); **Tsizh Bohdan**, Professor of Stepan Gzhytskyi National University of Veterinary Medicine and Biotechnologies Lviv, Department of General Technical Subjects and Production Quality Control, Lviv (Ukraine); **Vovk Ruslan**, Professor of Karazin Kharkiv National University, Department of low temperature physics, Kharkiv (Ukraine); **Zhelezny Vitaly**, Professor of Odessa National Academy of Food Technologies, Department of Thermal Physics and Applied Ecology, Odessa (Ukraine)

TECHNOLOGY ORGANIC AND INORGANIC SUBSTANCES

Arvaidas Galdikas, Professor Kaunas University of Technology, Department of Physics, Kaunas (Lithuania); **Barsukov Viacheslav**, Professor Kyiv National University of Technologies and Design, Department for Electrochemical Power Engineering and Chemistry, Kyiv (Ukraine); **Carda Juan B.**, Professor of Universidad Jaume I, Department of Inorganic Chemistry, Castellon de la Plana (Spain); **Chumak Vitaliy**, Professor of National Aviation University, Department of Chemistry and Chemical Engineering, Kyiv (Ukraine); **Doroshenko Andrey**, V. N. Karazin Kharkiv National University, Department of organic chemistry, Kharkov (Ukraine); **Gerashimchuk Nikolay**, Professor of Missouri State University, Department of Chemistry, Springfield (United States); **Rotaru Andrei**, Professor of University of Craiova, Department of Physics (Craiova); **Kapustin Alexey**, Professor of Pryazovskiy State Technical University, Department of Chemistry, Mariupol (Ukraine), Miami University Oxford (USA); **Kolosov Akeksandr**, Professor of National Technical University of Ukraine «Igor Sikorsky Kyiv Polytechnic Institute», Department of Chemical, Polymeric and Silicate Machine Building, Kyiv (Ukraine); **Krivenko Pavel**, Professor Kyiv National University of Construction and Architecture, Scientific Research Institute for Binders and Materials, Kyiv (Ukraine); **Martins Luisa**, Associate Professor of Universidade de Lisboa, Instituto Superior Tecnico, Lisbon (Portugal); **Plavan Viktoriia**, Professor Kyiv National University of Technologies and Design, Department of Applied Ecology, Technology of Polymers and Chemical Fiber, Kyiv (Ukraine); **Roshal Alexander**, V. N. Karazin Kharkiv National University, Research Institute of Chemistry, Kharkiv (Ukraine); **Rotaru Andrei**, University of Craiova, Department of Physics (Craiova); **Sprynskyy Myroslav**, Nicolaus Copernicus University in Torun, Department of Environmental Chemistry and Bioanalytics, Torun (Poland); **Sukhyy Mikhaylo**, Professor of Ukrainian State University of Chemical Technology, Department of Processing of Plastics and Photo-, Nano- and polygraphic materials, Dnipro (Ukraine); **Vakhula Yaroslav**, Professor of Lviv Polytechnic National University, Department of Silicate Engineering, Lviv (Ukraine); **Zeng Liang**, Tianjin University, School of Chemical Engineering and Technology, Tianjin (China)

APPLIED MECHANICS

Aifantis Elias, Aristotle University of Thessaloniki, Thessaloniki (Greece); **Akhundov Vladimir**, Professor of National metallurgical academy of Ukraine, Department of Applied mechanics, Dnipro (Ukraine); **Andrianov Igor**, Professor of RWTH Aachen University, Department of General Mechanics, Aachen (Germany); **Astanin Vyacheslav**, Professor of National Aviation University, Department of Mechanics, Kyiv (Ukraine); **Avramov Konstantin**, Professor of A. Podgorny Institute of Mechanical Engineering Problems of the National Academy of Sciences of Ukraine, Department of reliability and dynamic strength, Kharkiv (Ukraine); **Filimonikhin Gennadiy**, Professor of Central Ukrainian National Technical University, Department of Machine Parts and Applied Mechanics, Kropyvnytskyi (Ukraine);

Fomychov Petro, Professor of National Aerospace University «Kharkiv Aviation Institute» named after N. E. Zhukovsky, Department of Aircraft strength, Kharkiv (Ukraine); **Legeza Viktor**, Professor of National Technical University of Ukraine «Igor Sikorsky Kyiv Polytechnic Institute», Department of Computer Systems Software, Kyiv (Ukraine); **Lewis Roland W.**, Swansea University, Department of Civil Engineering, Swansea (United Kingdom); **Loboda Volodymyr**, Professor of Oles Honchar Dnipro National University (Ukraine); **Lvov Gennadiy**, Professor of National Technical University «Kharkiv Polytechnic Institutes», Department of dynamics and strength of machines, Kharkiv (Ukraine); **Pukach Petro**, Professor of Lviv Polytechnic National University, Department of Computational Mathematics and Programming, Lviv (Ukraine); **Romualdovich Sergey**, Professor of National Aviation University, Department of Aircraft construction, Kyiv (Ukraine); **Sapountzakis Evangelos**, National Technical University of Athens, Civil Engineering, Athens (Greece); **Tornabene Francesco**, University of Bologna, Department DICAM, Bologna (Italy); **Uchino Kenji**, Pennsylvania State University, Electrical Engineering, University Park (USA); **Visser, Frank C.**, Flowserve, AMSS, Etten-Leur (Netherlands); **Yaroshevich Nikolai**, Professor of Lutsk National Technical University, Department of Branch Engineering, Lutsk (Ukraine)

ENERGY-SAVING TECHNOLOGIES AND EQUIPMENT

Acaroglu Mustafa, Selcuk Universitesi, Department Energy Division, Konya (Turkey); **Avramenko Andriy**, Professor of Institute of Engineering Thermophysics of National academy of sciences of Ukraine, Department of heat and mass transfer and hydrodynamics in heat power equipment, Kyiv (Ukraine); **Besagni Giorgio**, Ricerca sul Sistema Energetico, Energy Systems Development Department, Milan (Italy); **Calise Francesco**, Universita degli Studi di Napoli Federico II, Department of Industrial Engineering, Naples (Italy); **Fialko Nataliia**, Professor of Institute of Engineering Thermophysics of National academy of sciences of Ukraine, Department of energy efficient of heat technologies, Kyiv (Ukraine); **Guerrero Josep M.**, Aalborg Universitet, Energy Technology, Aalborg (Denmark); **Li Haiwen**, Kyushu University, Platform of Inter/Transdisciplinary Energy Research (Q-PIT), Fukuoka (Japan); **Liubarskyi Borys**, Professor of National Technical University «Kharkiv Polytechnic Institutes», Department of electrical transport and diesel locomotive, Kharkiv (Ukraine); **Ma Zhenjun**, University of Wollongong, Sustainable Buildings Research Centre, Wollongong (Australia); **Morosuk Tatiana**, Technical University of Berlin, Institute for Energy Engineering, Berlin (Germany); **Popescu Mihaela**, University of Craiova, Department of Electromechanics, Environment and Applied Informatics, Craiova (Romania); **Rusanov Andrii**, Professor of A. Podgorny Institute of Mechanical Engineering Problems of the National Academy of Sciences of Ukraine, Department of Hydroaeromechanics of Power Machines, Kharkiv (Ukraine); **Santamouris Mattheos**, University of New South Wales, Built Environment, Sydney (Australia); **Sutikno Tole**, Professor of Universitas Ahmad Dahlan, Department of Electrical Engineering, Yogyakarta (Indonesia); **Yerokhov Valerij**, Professor of Lviv Polytechnic National University, Department of Semiconductor Electronics, Lviv (Ukraine)

INFORMATION AND CONTROLLING SYSTEM

Bezruk Valeriy, Professor of Kharkiv National University of Radio Electronics, Department of Information and Network Engineering, Kharkiv (Ukraine); **Shcherbakova Galyna**, Associate professor of Odessa National Polytechnic University, Department of electronic apparatus & information technology, Odessa (Ukraine); **Uryvsky Leonid**, Professor of National Technical University of Ukraine «Igor Sikorsky Kyiv Polytechnic Institute», Department of telecommunication, Kyiv (Ukraine); **Sattarova Ulkar Eldar**, Associate Professor Azerbaijan University of Architecture and Construction, Department of Information technologies and systems, Baku (Azerbaijan); **Starovoitov Valery**, Professor, Doctor of sciences, United Institute of Informatics Problems, National Academy of Sciences of Belarus, Laboratory of System Identification, Minsk (Belarus); **Velychko Oleh**, Professor of State Enterprise «Ukrmetreststandards», Institute of Electromagnetic Measurements, Kyiv (Ukraine); **Yatskiv Vasyl**, Associate professor of Ternopil National Economic University, Department of Cyber Security, Ternopil (Ukraine)

ECOLOGY

Boichenko Sergii, Professor of National aviation universit, Department of ecology, Kyiv (Ukraine); **Gomelia Nikolai**, Professor of National Technical University of Ukraine «Igor Sikorsky Kyiv Polytechnic Institute», Department of Ecology and Technology of Plant Polymers, Kyiv (Ukraine); **Kisi Ozgur**, Iliia State University, Faculty of Natural Sciences and Engineering, Tbilisi (Georgia); **Makarynskyi Oleg**, Australian Institute of Marine Science, Arafura Timor Research Facility (Australia); **Remez Natalya**, Professor of National Technical University of Ukraine «Igor Sikorsky Kyiv Polytechnic Institute», Department of Environmental Engineering, Kyiv (Ukraine); **Scholz Miklas**, Lunds Universitet, Department of Water Resources Engineering, Lund (Sweden); **Shvedchikova Iryna**, Professor Kyiv National University of Technologies and Design, Department of Electronics and Electrical Engineering, Kyiv (Ukraine)

TECHNOLOGY AND EQUIPMENT OF FOOD PRODUCTION


Adegoke Gabriel, Professor of University of Ibadan, Department of Food Technology, Ibadan (Nigeria); **Barreca Davide**, Universita degli Studi di Messina, Department of Chemical Biological Pharmaceutical and Environmental Sciences, Messina (Italy); **Burdo Oleg**, Professor of Odessa National Academy of Food Technologies, Department of processes, equipment and energy management, Odessa (Ukraine); **Effat Baher**, National Research Centre, Dairy Science Department, Cairo (Egypt); **Erkmen Osman**, Gaziantep Universitesi, Department of Food Engineering, Gaziantep (Turkey); **Hafiz Ansar Rasul Suleria**, PhD, Kansas State University, Department of Food, Nutrition, Dietetics and Health, Manhattan (USA); **Modi Vinod**, Central Food Technological Research Institute India, Department of Meat, Fish and Poultry Technology, Mysore (India); **Pavlyuk Raisa**, Professor of Kharkiv State University of Food Technology and Trade, Department of Technology processing of fruits, vegetables and milk, Kharkiv (Ukraine)

MATERIALS SCIENCE

Apostolopoulos Charis, Patras University, Department of Mechanical Engineering and Aeronautics, Patra (Greece); **Bocchetta Patrizia**, University of Salento, Engineering of innovation, Salento (Italy); **Buketov Andriy**, Professor of Kherson State Maritime Academy, Department of Transport technologies, Kherson (Ukraine); **Dubok Vitalii**, Professor of Taras Shevchenko National University of Kyiv, Department of Radiophysical Phaculty, semiconductor physical chair, Kyiv (Ukraine); **Duriagina Zoia**, Professor of Lviv Polytechnic National University, Department of Applied Materials Science and Materials Engineering, Lviv (Ukraine); **Efremenko Vasyl**, Professor of State Higher Educational Institution «Priazovivskiy State Technical University», Department of Physics, Mariupol (Ukraine); **Gevorkyan Edvin**, Professor of Ukrainian State University of Railway Transport, Department of Quality, standardization, certification and materials making technology, Kharkiv (Ukraine); **Gubicza Jenő**, Eotvos Lorand University, Department of Materials Physics, Budapest (Hungary); **Gupta Manoj**, National University of Singapore, Singapore City (Singapore); **Yaremiv Ivan**, Professor of Vasyl Stefanyk Precarpathian National University, Department of Material Science and New Technology, Ivano-Frankivsk (Ukraine)

TRANSFER OF TECHNOLOGIES: INDUSTRY, ENERGY, NANOTECHNOLOGY

Babenko Vitalina, V. N. Karazin Kharkiv National University, Department of International E-commerce and Hotel&Restaurant Business, Kharkiv (Ukraine); **Gontareva Iryna**, V. N. Karazin Kharkiv National University, Department of Marketing, management and entrepreneurship, Kharkiv (Ukraine); **Baker H. Kent**, American University, Kogod School of Business, Department of Finance and Real Estate, Washington (USA); **Carvalho Luisa**, Polytechnic Institute of Setubal, School of Business and Administration, Setubal (Portugal); **Fedorko Gabriel**, Technical university of Kosice, Institute of Logistics and Transport, Kosice (Slovakia); **Grima Simon**, University of Malta, Department of Insurance, Msida (Malta); **Mazelis Lev**, Vladivostok State University of Economics and Service, Department of Mathematics and Modeling, Vladivostok (Russia); **Prystemskiy Oleksandr**, Kherson State Agrarian and Economic University, Department of Accounting and Taxation, Kherson (Ukraine); **Pukala Ryszard**, Bronislaw Markiewicz State University of Technology and Economics, Institute Economy and Management, Jaroslaw (Poland); **Dzhedzhula Viacheslav**, Vinnytsia national technical university, Department of Finance and Innovation Management, Vinnytsia (Ukraine); **Yuri Romanenkov**, National Aerospace University «Kharkiv Aviation Institute» Department of Management, Kharkiv (Ukraine)

<p>Publisher PC TECHNOLOGY CENTER</p> <p>Establishers PC TECHNOLOGY CENTER Ukrainian State University of Railway Transport</p> <p>Editorial office's and publisher's address: Shatylova dacha str., 4, Kharkiv, Ukraine, 61165</p> <p>Contact information Tel.: +38 (057) 750-89-90 E-mail: eejet@entc.com.ua Website: http://www.jet.com.ua, http://journals.uran.ua/ccjct</p> 	<p>Journal Indexing</p> <ul style="list-style-type: none"> ■ Scopus ■ CrossRef ■ American Chemical Society ■ EBSCO. Applied Science & Technology Source ■ EBSCO. Computers & Applied Sciences Complete ■ Index Copernicus ■ MIAR ■ CNKI ■ Ulrich's Periodicals Directory ■ Neliti ■ Julkaisuforum ■ 1findr ■ BASE ■ WorldCat ■ Polska Bibliografia Naukowa 	<p>Видавець ІНІ "ТЕХНОЛОГІЧНИЙ ЦЕНТР"</p> <p>Свідоцтво про державну реєстрацію журналу КВ № 21546-11446 ПР від 08.09.2015</p> <p>Атестовано Постановою Президії ВАК України № 1-05/2 від 27.05.2009, № 1-05/3 від 08.07.2009 Бюлетень ВАК України</p> <p>Наказом Міністерства освіти і науки України №793 від 04.07.2014</p> <p>Наказом Міністерства освіти і науки України № 612 від 07.05.2019 Категорія А</p> <p>Підписано до друку 26.10.2021 р.</p> <p>Формат 60 x 84 1/8. Друк арк. 14,00. Обл.-вид. арк. 13,02</p>
---	--	--

UDC 637.5

DOI: 10.15587/1729-4061.2021.240675

Culinary meat products, in particular, delicacies, account for a significant share of the diet in many countries of the world, predetermining the need to introduce innovative solutions for the production of products of a wide range of use with original taste properties.

A structure of the device for low-temperature processing of meat delicacies involving the heating of the working surface with a flexible film resistive electric heater of radiative type has been developed. Temperature control is carried out with a needle thermocouple. That makes it possible to cool the delicacy to 25...30 °C by autonomous fans during the conversion of secondary thermal energy by Peltier elements. It was established that the low voltage at the temperature of 70...80 °C is 4...6 W, and, at 25...30 °C, it is, respectively, 1.5...3 W. A comparative analysis has been performed of the heat treatment of meat delicacy in the traditional way and in the developed apparatus upon reaching 71...75 °C inside the product.

The temperature for a traditional machine, after 5 minutes of processing, is 15...17 °C at the contact surface and 8 °C at the center. For the model structure, the temperature of the contact surface is 7...8 °C, and 4...5 °C in the center. After 25 minutes of processing in the traditional way, the temperature in the center was 17...18 °C, in the near-wall layers – 60 °C. In the model structure, 8...9 °C, at a temperature of the near-wall layers of 25 °C. The temperature difference from the center to the near-wall layer, depending on the processing time in the traditional way, ranges from 10 to 50 °C, and, in the model apparatus, from 4 to 24 °C. The model device provides a uniform heat supply under conditions of achievement of 71...75 °C in the center of a product with a reduction of specific cost by 2.6 times in comparison with a traditional technique. The ham prepared in the developed apparatus is characterized by uniform coloration, juiciness, and natural original taste

Keywords: meat delicacies, low-temperature processing apparatus, temperature field, secondary energy, Peltier elements

DESIGN OF AN APPARATUS FOR LOW-TEMPERATURE PROCESSING OF MEAT DELICACIES

Andrii Zahorulko

Corresponding author

PhD, Associate Professor*

E-mail: zagorulkoAN@hduht.edu.ua

Oleksander Cherevko

Doctor of Technical Sciences, Professor

Department of Processes and Equipment Food

and Hospitality-Restaurant Industry named after M. Belaev

Kharkiv State University of Food Technology and Trade

Klochkivska str., 333, Kharkiv, Ukraine, 61051

Aleksey Zagorulko

PhD, Associate Professor*

Marina Yancheva

Doctor of Technical Sciences, Professor, Head of Department

Department of Meat Technology**

Nina Budnyk

PhD, Associate Professor

Department of Food Production

Poltava State Agrarian University

Skovorody str., 1/3, Poltava, Ukraine, 36003

Yuliya Nakonechna

PhD, Associate Professor***

Natalia Oliynyk

PhD, Associate Professor***

Nadia Novgorodska

PhD, Associate Professor

Department of Food Technologies and Microbiology

Vinnitsia National Agrarian University

Sonyachna str., 3, Vinnitsia, Ukraine, 21008

* Department of Equipment and Engineering of Processing and Food Production**

** State Biotechnological University

Alchevskykh str., 44, Kharkiv, Ukraine, 61002

***Department of Technology of Food Production and Restaurant Management

Poltava University of Economics and Trade

Kovalia str., 3, Poltava, Ukraine, 36003

Received date 09.08.2021

Accepted date 22.09.2021

Published date 29.10.2021

How to Cite: Zahorulko, A., Cherevko, O., Zagorulko, A., Yancheva, M., Budnyk, N., Nakonechna, Y., Oliynyk, N.,

Novgorodska, N. (2021). Design of an apparatus for low-temperature processing of meat delicacies. *Eastern-European*

Journal of Enterprise Technologies, 5 (11 (113)), 6–12. doi: <https://doi.org/10.15587/1729-4061.2021.240675>

1. Introduction

Meat products are one of the main food items in many countries around the world, manufactured according to a variety of culinary and industrial technologies using heat and mass exchange equipment. The range of meat delicacies can be presented in a variety of forms, in particular ham, pate,

roll, saltison, etc., which are produced using technologies known in the years of our era [1–3]. A significant impact on the technological quality of meat delicacies production is exerted by equipment for heat and mass-exchange processing of products, which must meet modern resource-efficient requirements [4]. This approach requires constant development of food industry processes towards improving existing struc-

tural and technological solutions to ensure the production of high-quality meat delicacies when using resource-efficient equipment. Achieving resource efficiency in the production of meat delicacies is possible under the conditions of the use of modern heating elements with low energy and metal consumption, regulated temperature influence, ease of maintenance, and ensuring the possibility of using secondary energy.

Therefore, it is a relevant task to design an effective apparatus for low-temperature processing of meat delicacies when using a modern resource-efficient heater of the radiative type, characterized by portability, functionality to ensure the original organoleptic properties of meat delicacies.

2. Literature review and problem statement

Paper [5] reports a study into the heat treatment of meat products at a temperature of 50...65 °C over a long period, characterizing low-temperature culinary processing. That makes it possible to give the meat product a more gentle and better appearance than when cooked at higher temperatures. However, consumers have concerns about the possibility of achieving not only the culinary readiness of the product but also ensuring microbiological safety since heat treatment causes a change in the structure of meat and its components. Denaturation, aggregation, and degradation of connective tissue proteins occur depending on the duration and temperature of heat treatment. However, questions remain about the impact of existing equipment on the quality of heat and mass exchange operations for the production of meat products. Thus, paper [6] reports practical studies aimed at determining the rational conditions for heat treatment of meat raw materials in the temperature range of 51...100 °C when comparing the baking and cooking process in water. The chemical analysis presented in the paper reveals that with an increase in temperature in the center of the sample, due to an intensive decrease in humidity, an increase in the content of fat, ash, proteins, and minerals is ensured. At the same time, the optimum temperature in the center of the pork product is within 71...81 °C. However, the impact of the structural component of the implementation of heat treatment on the resulting quality of the received product due to the highly specialized equipment and the need to implement resource-efficient technologies remains unaddressed.

Work [7] reports a study into the analysis of nutritional value and factors affecting the final quality and safety of the use of traditional meat products. The study results revealed various problems associated with the use of classical technologies and equipment, which, in its design and technological features, is not fully able to ensure the versatility of the production of meat delicacies. Therefore, there is a practical and scientific task to form ways to improve the effective heat and mass exchange equipment. Thus, paper [8] presents comparative studies of the heat treatment of chicken meat in a convective furnace and the technology of sous-vide, followed by a study of the quality obtained. It was found that the use of sous-vide technology at 60 °C lasting for 1 hour is characterized by lower production losses and high rates of tenderness in comparison with samples obtained in a convective furnace. However, the reported results are mostly aimed at determining the technological component leaving the technical component unattended, in terms of the uniformity of heat supply, the degree of juice loss, and the ef-

iciency of the equipment used, in particular the steam bath in the sous-vide technology. For example, work [9] provides a hardware-technological solution aimed at the development of a device for low-temperature processing of meat products by IR radiation in a gentle temperature range of 63...85 °C indicating the received organoleptic properties. However, the structure is characterized by a certain range of products and does not make it possible to produce a wide range of meat culinary products, which, in turn, requires research to minimize the geometric impact on the technological process.

Works [10, 11] describe research aimed at determining the effectiveness of the baking process of meat products compared to sous-vide technology when cooking in a steam bath. That confirms the effectiveness of the sous-vide technology, however, the use of steam baths or cooking in liquids greatly complicates the structural component due to the complexity of the process implementation and temperature control. This, in turn, to some extent affects the resulting quality of the product. Specifically, work [12] investigates the effectiveness of low-temperature processing of meat products with a temperature of up to 85 °C in the steam convector using sonication. The proposed technology reduces the duration of heat treatment but no data are given regarding the efficiency of sonication equipment maintenance. Paper [13] investigates the impact of heat treatment of meat raw materials on the received quality, depending on the heat supply techniques, without taking into consideration the degree of heat supply uniformity. That may be due to the complexity of creating a uniform heat supply in classical devices for heat treatment of meat raw materials, due to the design properties of the working chamber and heat source, for example, heaters, steam, water, etc. The most uniform geometric chambers are spherical and cylindrical, but they require the use of flexible and resource-efficient technologies to ensure the uniformity of the heat flow; in particular, in work [14], uniformity in the cylindrical apparatus is investigated. Uniformity of the cylindrical surface is ensured by modern resource-efficient flexible film resistive electric heater of radiative type (FFREhRT) [15], which has low energy and metal consumption, ease of use, and maintenance. An important component of modern heaters is the introduction of technologies for the use of secondary energy for cooling or the generation of low-voltage power, in particular for exhaust fans due to the properties of Peltier elements [16, 17]. That gives relevance to research into the development of low-temperature equipment for meat delicacies while the practical implementation of modern innovative solutions could ensure the design of fundamentally new equipment with a wide range of use in the food sector and home life. Most existing technological equipment for the production of meat delicacies in the market has some design and technological shortcomings. For example, there are difficulties with heat supply, namely in the case of using a standard device for cooking ham, the capsule with raw materials is partially immersed in water and heated by it [18]. This makes it difficult to control the temperature of the gas or electric heating of the water heat carrier with the submerged capsule, and hence the unevenness of cooking, in particular during the aging of the delicacy to full readiness.

Existing devices cannot use secondary energy to ensure the autonomy of any auxiliary elements, thus allowing us to state some of the main structural and technological tasks to

improve the production of meat delicacies, in particular, the apparatus should provide for the following:

- the uniformity of heat treatment of the entire volume of meat delicacy under the conditions of accurately controlled heating;
- the pressing of meat raw materials during heat treatment, followed by cooling of the finished culinary delicacy.

Ensuring these conditions is the creation of an efficient device for low-temperature processing of meat delicacies with resource-efficient properties, portability, and ease of use due to infrared heat treatment. The use of such a device could solve the issue of uniform heat and mass exchange processing of meat raw materials, ensuring the expansion of market assortment due to the production of delicacies with original taste properties.

3. The aim and objectives of the study

The purpose of this work is to design an effective apparatus for the low-temperature processing of meat delicacies through the use of IR heat treatment and the use of secondary energy. This would make it possible to intensify the process of low-temperature treatment of meat raw materials based on modern approaches to the production of high-quality delicacies in various food areas with the expansion of the range.

To accomplish the aim, the following tasks have been set:

- to design a model structure of the apparatus for low-temperature processing of meat delicacies with a flexible film resistive electric heater of radiative type and Peltier elements for converting secondary heat energy into low-voltage supply voltage of exhaust fans;
- to determine the effectiveness of the designed device and the organoleptic properties of ham compared to the traditional culinary processing technique.

4. The study materials and methods

The experimental and practical research on determining ways to improve the apparatuses of heat treatment of meat products, in particular for the development of a modern apparatus (portable, mobile, and easy to operate) designed for low-temperature processing of meat delicacies was performed at the scientific and educational center “Newest biotechnology and equipment for the production of food products with high wellness properties” at the State Biotechnological University (Ukraine).

To determine the uniformity of a temperature field generated by FFREhRT, pork meat was used in the model structure for the further production of ham. The ham preparation technique involved preliminary rinsing of the raw materials, followed by slicing in sizes of 10×10 mm and 0.5×0.5 mm to obtain a homogeneous dense structure in the formation. NaCl and spices were added to the chopped pork, followed by stirring and maturation in the fridge for 2.0...3.0 hours. Next, the meat raw materials were laid in the shell of the model structure, closed with a lid for further heat treatment (cooking) in natural juice until reaching 71...75 °C in the center of the product. After culinary readiness, we cooled it to 25...30 °C for selling.

Temperature control and regulation were carried out by the eight-channel thermostat “OVEN” (Ukraine) with the help of needle thermocouples.

5. Studying the effectiveness of structural solutions in the apparatus to produce meat delicacies

5.1. Designing a model structure of the device for low-temperature processing of meat delicacies

The designed model structure of the apparatus for low-temperature processing of meat delicacies (Fig. 1) consists of cylindrical working container 1, which acts as a molding capsule to give the geometric shape of the received product. In the capsule, the formation (pressing) of meat delicacies, made according to any formulation ratio and in the conditions of stuffing raw materials in the shell, is carried out. At the bottom of the machine, centrally distributed spring 2 is connected to disk pressing platform 3.

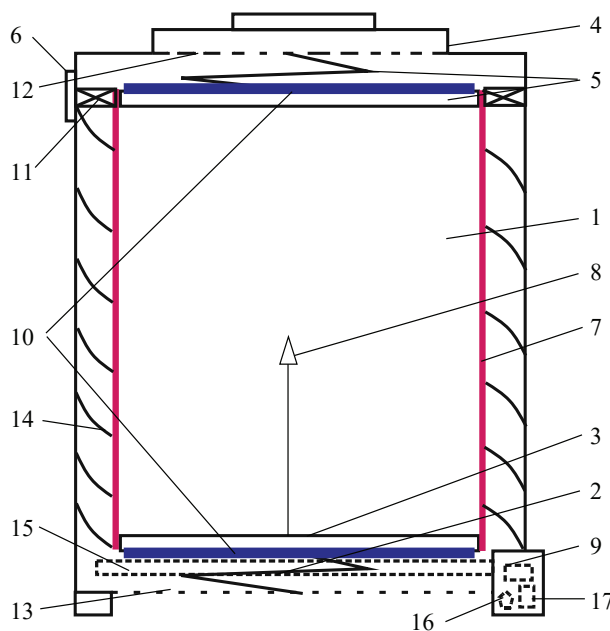


Fig. 1. Schematic of the designed model structure of the apparatus for low-temperature processing of meat delicacies: 1 – cylindrical working container (molding capsule); 2 – spring; 3 – disk pressing platform; 4 – cover with a spring cylindrical surface; 5 – spring loaded cylindrical surface 6 – clamps; 7 – flexible film resistive electric heater of radiative type (FFREhRT); 8 – needle thermocouple; 9 – TPM thermostat; 10 – contact surface of Peltier elements; 11 – exhaust fans; 12, 13 – fresh air intake and drainage holes; 14 – airflow guides; 15 – capacity for technical fluid; 16 – technical fluid drainage nozzle; 17 – control unit

After loading the meat raw materials into capsule 1, it is closed with lid 4 with spring cylindrical surface 5 with the help of latch 6. The working surface is heated by FFREhRT 7, which repeats the cylindrical shape of tank (capsule) 1 and acts as a working surface at the same time. Temperature measurement in the apparatus is carried out with needle thermocouple 8, which is mounted in the center of lower disk pressing platform 3 and connected to thermostat TPM 9, made by “Oven” (Ukraine).

Low-temperature processing of meat raw materials is carried out until reaching 71...75 °C in the center of the product by FFREhRT (7). In this case, the device can further cool the delicacy to 25...30 °C by blowing the outer surface of the working capsule with air coming through holes 12 and is injected with exhaust fans 11. Air movement

is carried out according to the screw trajectory around capsule 1 by flow guides 14, followed by the removal of air to the environment through holes 13. Exhaust fans work autonomously after reaching 71...75 °C in the center of the product by the conversion of thermal energy from Peltier elements located at contact surface 10. It was established that the low voltage at the temperature of the contact surface of Peltier elements of 70...80 °C is 4...6 W, and, at a temperature of 25...30 °C, it is, respectively, 1.5...3 W, enabling the autonomous operation of exhaust fans. In the lower part of the apparatus, under disk pressing platform 3, there is technical container 15 for collecting liquid fraction in the case of partial juice removal from the meat product, followed by discharge through nozzle 16. At the bottom of the machine, there is a heat control unit 17 with a built-in thermostat, technical liquid draining nozzle 16, a control unit for Peltier elements and exhaust fans.

5.2. Determining the effectiveness of the designed apparatus and the organoleptic properties of culinary products

To confirm the effectiveness of the structural and technological decisions taken during the design of the apparatus for low-temperature processing of meat delicacies, one of the main tasks is to ensure uniform distribution of heat flow, and, therefore, the heating of raw materials. Information on the temperature field of the prototypes was recorded with needle thermocouples every 30 minutes; the distance between thermocouples was 20 mm (the diameter of the product is 120 mm). The thermocouples were placed in the transverse section of the product along the axis of diameter. The proposed arrangement of thermocouples (Fig. 2, *a*, pos. 1) made it possible to determine the resulting uniformity of the distribution of heat flow in the prototype, in particular, during the use of the designed model of the apparatus for low-temperature processing of meat delicacies.

To confirm the uniformity of the temperature field in the low-temperature apparatus using the "Oven" software connected to the TPM and 7 needle thermocouples and pre-set temperature at 70 °C. The average total temperature of the experimental space of the device is within ± 1 °C, which is a confirmation of the uniformity of temperature control over the volume of the apparatus when using FFREhRT (reading thermocouple numbers is carried out from left to right, according to Fig. 2, *a*).

Experimentally and practically, the process of thermal treatment was investigated, using the example of meat delicacy, ham, prepared in the traditional way (cooking in the volume of water) and processing in the designed apparatus based on FFREhRT. The ham was heated under the conditions of achieving 71...75 °C in the center of the meat product with the measurement of the temperature field by 7 needle thermocouples, located according to the scheme shown in Fig. 2. We obtained temperature distribution curves with the change of time for prototypes made in the traditional way (Fig. 3, *a*) and in the designed model structure of the apparatus for low-temperature processing of meat delicacies (Fig. 3, *b*). It was established that the actual temperature of the prototypes after 5 minutes of processing, for a traditional device, at the contact surface of the product, is 15...17 °C with a temperature in the center equal to 8 °C (Fig. 3, *a*, curve 1). In the model structure, the temperature of the contact surface is 7...8 °C; in the center – 4...5 °C (Fig. 3, *b*, curve 1).

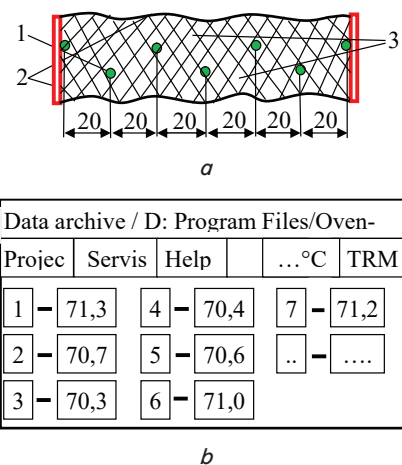


Fig. 2. Experimental and practical determining of the temperature field in the transverse section of the experimental meat delicacy – ham: *a* – layout of thermocouples: 1 – needle thermocouple, 2 – fragment of the working chamber area with the heating surface, 3 – the transverse section of the experimental meat delicacy; *b* – data from needle thermocouples connected to TPM in real time using the software "Oven"

After 25 minutes of processing, the temperature of the sample with the traditional production technique in the center of the product was 17...18 °C (curve 2 in Fig. 3, *a*), and in the model structure – 7...9 °C (curve 2 in Fig. 3, *b*). At the same time, the temperature of the near-wall layers of the ham prototypes using the traditional technique is 60 °C, that is, it actually increased by 4 times, in the model sample, 25 °C, it, respectively, increased by 2.5 times. The temperature curves (3–7 in Fig. 3, *a*) of production in the traditional way are characterized by temperature fluctuations within 2...5 °C with the achievement at the end of the process of the temperature of the near-wall layer of 75 °C. Starting from minute 50 of heat treatment of the sample produced in the traditional way, the predicted alignment and reduction of the difference between the near-wall and central layers is observed (Fig. 3, *a* – curves 3–7).

At the same time, the difference in the temperature of the near-wall layers during heat treatment in the model apparatus (curves: 3–6 in Fig. 3, *b*) is 7...12 °C, between the curves. Temperature curves 7–9 (Fig. 3, *b*) demonstrate uniform temperature fluctuations with the achievement of 71...75 °C. At the end of the process, the temperature field of ham samples is actually the same (Fig. 3, *a, b* – curves 7, 9) with a minimum temperature difference of about 8...10 °C. Therefore, we can conclude that the temperature field is uniform as, therefore, the heat treatment of meat delicacies in the model structure of the device for low-temperature processing based on FFREhRT. As a result, high quality of the obtained products is ensured with simultaneous simplification of the heat supply technique and elimination of intermediate heat carriers, in particular cooking in water.

To confirm the effectiveness of the designed apparatus for low-temperature processing of meat delicacies in comparison with the traditional production technique (cooking in water), we have compared the characteristics of heat consumption (Table 1). The initial data for the calculation are the masses of the product, devices, and auxiliary equipment, as well as the starting temperature, and the average one, at the end of heat treatment of the finished product. The calculations were performed without taking into consideration the losses to the environment.

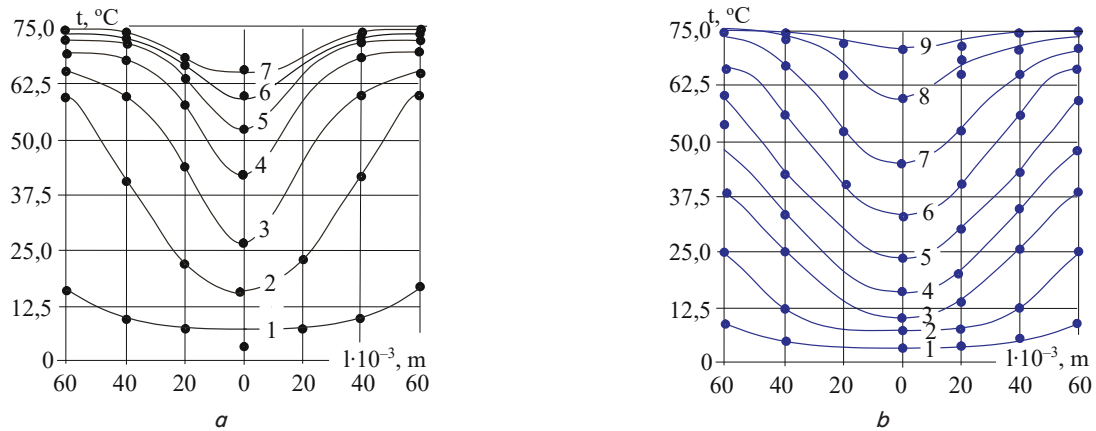


Fig. 3. Temperature distribution of ham prototypes depending on the duration of heating: *a* – in the traditional way; *b* – model apparatus, curves: 1 – 5 min; 2 – 25 min; 3 – 50 min; 4 – 75 min; 5 – 100 min; 6 – 125 min; 7 – 150 min; 8 – 175 min; 9 – 200 min

Table 1

Comparative characteristics of the apparatus for low-temperature processing of meat delicacies compared to the traditional device to produce ham

Indicator	Traditional apparatus for making ham	Apparatus for low-temperature processing of meat delicacies
Apparatus weight	$m=0.35$ kg	$m=0.45$ kg
Apparatus heating	$Q_h=m_1c_{raw}(t_2-t_1)=0.35\cdot0.48(100-20)=13.5$ kJ	$Q_h=m_1c_{raw}(t_2-t_1)=0.45\cdot0.48(68-20)=10.3$ kJ
The cost of achieving the culinary readiness of the product	$Q_{pr}=mc(t_5-t_4)=1.16\cdot3056\cdot(71-15)=198.5$ kJ	$Q_{pr}=mc(t_6-t_4)=1.16\cdot3056\cdot(68-15)=187.8$ kJ
Auxiliary equipment heating	$Q_a=mc(t_2-t_7)=1.5\cdot0.48\cdot(100-25)=54$ kJ	–
Heating of water in additional equipment	$Q_w=mc(t_2-t_7)=3.0\cdot4200\cdot(100-25)=245$ kJ	–
Total amount	$Q=Q_h+Q_{pr}+Q_a+Q_w=13.5+198.5+54+245=511$ kJ	$Q=Q_h+Q_{pr}=10.3+187.8=198.1$ kJ
Specific cost	$q_{pr}=Q/m=511/1.16=440$ kJ/kg	$q_{pr}=Q/m=198.1/1.16=170$ kJ/kg

Note: *Temperature, °C: t_1 – initial for devices; t_2, t_3 – devices at processing; t_4 – initial for products; t_5, t_6 – medium, for a product of culinary readiness; t_7 – initial for auxiliary equipment and heating medium (water)

We have established by calculation that the specific cost of making ham in the apparatus for low-temperature processing of meat delicacies, compared to the traditional apparatus, is 2.6 times less (Table 1), thereby confirming the effectiveness of the proposed solutions. In addition, an organoleptic evaluation of the ham was carried out by a group of experts from the State Biotechnological University (Table 2).

The organoleptic indicators confirm the effectiveness of the use of the device for low-temperature processing of meat delicacies that ensures uniform coloration and a juicy original taste at the same time.

Further practical application of the reported experimental study could ensure expanding the range of meat delicacies made according to a variety of recipe technologies, with the possibility of introducing a variety of dried products into their composition to give products original taste properties. The resulting products would also be characterized by the juiciness, aroma, and properties of real meat. At the same time, non-compliance with technological and design recommendations when using the apparatus for low-temperature processing based on FFREhRT, in particular, the application of meat without pre-pickling could lead to a change in the resulting organoleptic properties of delicacies.

Our scientific and practical results confirm the expediency of further use of the designed apparatus at hotel and restaurant establishments and at home. The structural and

technological advantages of the designed apparatus are resource efficiency, simplification of the heat supply system with the provision of a uniform temperature field due to the use of FFREhRT, the simplicity of design, and mobility.

Table 2

Organoleptic evaluation of ham prototypes

Indicator	Characteristics of the made ham	
	in a traditional way	in the apparatus for low-temperature processing of meat delicacies
Physical appearance	uniform meat substance	uniform meat substance
Taste and aroma	pork taste with natural smell and hard crust of the product	pronounced natural taste and smell of pork with uniform juiciness of the product
Color	the outer surface of the product has a darker section compared to the center of the product	the color of the product throughout the volume has a red-grayish tint
Consistency	the crust has stiffness and less juiciness compared to the center of the product	homogeneous meat consistency with uniform juiciness of the product

6. Discussion of results of meat delicacies production in the designed apparatus

The results of the research confirm the effectiveness of the previously proposed design and technological solutions for the development of an apparatus for low-temperature processing of meat delicacies by IR radiation based on FFREhRT. The innovative solution proposed during the design of the apparatus has made it possible to simplify the heat supply system, eliminate the use of intermediate heat carriers and, in general, reduce energy and metal consumption while ensuring the most uniform temperature field.

The designed model structure of the device for low-temperature processing of meat delicacies makes it possible to press the product in a working capsule, which is heated by a flexible film resistive electric heater of the radiative type that repeats the geometry of the chamber (Fig. 1). The device also has the ability to cool the delicacy to 25...30 °C by blowing the outer surface of the capsule with air from stand-alone fans, powered by the conversion of thermal energy by Peltier elements (Fig. 1, position 10). The low voltage at 70...80 °C is 4...6 W, and, at a temperature of 25...30 °C, it is, respectively, 1.5...3 W. The uniformity of the temperature field in the low-temperature apparatus according to the data from 7 needle thermocouples with a pre-set temperature at the level of 70 °C (Fig. 2, *a*) has been proven. We have performed a comparative analysis of the thermal processing of meat delicacy made in the traditional way (cooking in the volume of water) and in the designed apparatus based on FFREhRT when achieving 71...75 °C in the center of meat product. The temperature after 5 minutes of processing, for a traditional machine, is 15...17 °C at the contact surface; the temperature in the center is 8 °C (Fig. 3, *a*, curve 1). For the model structure, the temperature of the contact surface is 9...10 °C, and in the center – 3...4 °C (Fig. 3, *b*, curve 1). After 25 minutes of processing in the traditional way, the temperature in the center of the product was 17...18 °C, in the near-wall layers – 60 °C, that is, it actually increased by 4 times. In the model structure, 8...9 °C, with the temperature of the near-wall layers of 25 °C, with an increase by 2.5 times (Fig. 3, *a*, *b*, curves 2).

The temperature difference in the prototype from the center to the near-wall layer, depending on the processing time in the traditional way, is from 10 to 50 °C, and in the model apparatus – from 4 to 24 °C (Fig. 3, *a*, *b*). Such data indicate a more uniform temperature effect in the model apparatus under conditions of reaching 71...75 °C in the center of the product.

Thus, we can conclude that the temperature field is uniform, as well as, therefore, the heat treatment of meat delicacies in the model structure of the device for low-temperature processing based on FFREhRT. The effectiveness of low-temperature processing of meat delicacies has been confirmed by calculating specific costs, which are 2.6 times less compared to the traditional technique (Table 1). The evaluation of the organoleptic indicators of ham also demonstrates better indicators of the low-temperature technique. The products obtained in the designed device are distinguished by the uniform coloration, juiciness, and natural original taste, unlike the traditional one where such high quality is not achieved (Table 2).

The introduction of the innovative design-technological solution, in comparison with analogs, could ensure the intensification of low-temperature processing of meat delicacies, providing a partial solution to the problem of optimizing the

relationship between the technological and structural components of the thermal process. That would ensure the expansion of the range of meat delicacies from a variety of raw materials in the designed apparatus for the food industry and at home, providing a modern approach to the implementation of the production of quality delicacies in various areas of nutrition.

The device proposed for practical implementation for low-temperature processing of meat delicacies is easy to use, portable, and effective due to the simplified heat supply system when using FFREhRT, and does not require professional knowledge. It should be noted that the quality of previous operations with meat raw materials, in particular at marinating, largely affects the final quality of the delicacies received. Further research is planned to be carried out in order to maximize tweaking the designed apparatus for the production of a diverse range of meat delicacies. At the same time, it is planned to study the effectiveness of the introduction of dried organic semi-finished products produced using effective technologies [19, 20] to ensure high-quality and original organoleptic properties.

7. Conclusions

1. A model structure of the apparatus for low-temperature processing of meat delicacies has been designed, consisting of a cylindrical capsule for forming the shape of the product. The working surface is heated by a flexible film resistive electric heater of the radiative type that repeats the cylindrical shape of the capsule. Temperature control is executed with a needle thermocouple connected to TPM until reaching 71...75 °C in the center of the product. At the same time, there is the possibility of cooling the delicacy to 25...30 °C by blowing the outer surface of the capsule with air. In this case, exhaust fans work autonomously powered by the secondary thermal energy converted by Peltier elements. It was established that the low voltage at a temperature of 70...80 °C is 4...6 W, and, at a temperature of 25...30 °C, it is, respectively, 1.5...3 W.

2. We have confirmed the uniformity of the temperature field in the low-temperature apparatus using 7 needle thermocouples at a temperature of 70 °C with slight temperature fluctuations within ± 1 °C. A comparative analysis of the heat treatment of meat delicacy in the traditional way (cooking in the volume of water) and in the designed apparatus based on FFREhRT upon reaching 71...75 °C in the center of the product. The temperature after 5 minutes of processing, for a traditional machine, is 15...17 °C at the contact surface, and the temperature in the center is 8 °C. For the model structure, the temperature of the contact surface is 9...10 °C; in the center – 3...4 °C. After 25 minutes of processing in the traditional way, the temperature in the center of the product was 17...18 °C, in the near-wall layers – 60 °C, that is, it actually increased by 4 times. In the model structure, 8...9 °C, with the temperature of the near-wall layers of 25 °C, with an increase by 2.5 times.

Consequently, the temperature difference from the center to the near-wall layer, depending on the processing time, in the traditional way, ranges from 10 to 50 °C, and in the model apparatus – from 4 to 24 °C. Thus, a uniform heat supply is provided in the model apparatus under the conditions of reaching 71...75 °C in the center of the product, as well as a reduction of specific costs by 2.6 times, compared to the traditional technique. The ham that was made in the designed apparatus is characterized by uniform color, juiciness, and natural original taste.

References

1. Ham production. Five main stages. Available at: <https://foodbay.com/wiki/masnaja-industrija/2016/06/10/proizvodstvo-vetchiny-pyat-osnovnyh-etapov/>
2. Govindasamy, K., Banerjee, B. B., Milton, A. A. P., Katiyar, R., Meitei, S. (2018). Meat-based ethnic delicacies of Meghalaya state in Eastern Himalaya: preparation methods and significance. *Journal of Ethnic Foods*, 5 (4), 267–271. Available at: <https://www.sciencedirect.com/science/article/pii/S2352618118300817>
3. Sgroi, F. (2021). Food traditions and consumer preferences for cured meats: Role of information in geographical indications. *International Journal of Gastronomy and Food Science*, 25, 100386. doi: <https://doi.org/10.1016/j.ijgfs.2021.100386>
4. Pankova, N. V. (Ed.) (2012). *Innovatsionnye tekhnologii v oblasti pischevyh produktov i produktsii obschestvennogo pitaniya funktsional'nogo i spetsializirovannogo naznacheniya*. Sankt-Peterburg: Izd-vo «LEMA», 314. Available at: <https://www.twirpx.com/file/1266062/>
5. Dominguez-Hernandez, E., Salaseviciene, A., Ertbjerg, P. (2018). Low-temperature long-time cooking of meat: Eating quality and underlying mechanisms. *Meat Science*, 143, 104–113. doi: <https://doi.org/10.1016/j.meatsci.2018.04.032>
6. Vujadinović, D., Marjanović-Balaban, Ž. (2012). Influence of Temperature and Heat Treatment Regime on Chemical Properties of Pork Meat. *Quality of Life (Banja Luka) - APEIRON*, 6 (3-4), 49–54. doi: <https://doi.org/10.7251/qol1203049v>
7. Halagarda, M., Wójciak, K. M. (2021). Health and safety aspects of traditional European meat products. A review. *Meat Science*, 108623. doi: <https://doi.org/10.1016/j.meatsci.2021.108623>
8. Park, C. H., Lee, B., Oh, E., Kim, Y. S., Choi, Y. M. (2020). Combined effects of sous-vide cooking conditions on meat and sensory quality characteristics of chicken breast meat. *Poultry Science*, 99 (6), 3286–3291. doi: <https://doi.org/10.1016/j.psj.2020.03.004>
9. Zahorulko, A., Zagorulko, A., Yancheva, M., Serik, M., Sabadash, S., Savchenko-Pererva, M. (2019). Development of the plant for low-temperature treatment of meat products using ir-radiation. *Eastern-European Journal of Enterprise Technologies*, 1 (11 (97)), 17–22. doi: <https://doi.org/10.15587/1729-4061.2019.154950>
10. Ruiz-Carrascal, J., Roldan, M., Refolio, F., Perez-Palacios, T., Antequera, T. (2019). Sous-vide cooking of meat: A Maillardized approach. *International Journal of Gastronomy and Food Science*, 16, 100138. doi: <https://doi.org/10.1016/j.ijgfs.2019.100138>
11. Da Silva, F. L. F., de Lima, J. P. S., Melo, L. S., da Silva, Y. S. M., Gouveia, S. T., Lopes, G. S., Matos, W. O. (2017). Comparison between boiling and vacuum cooking (sous-vide) in the bioaccessibility of minerals in bovine liver samples. *Food Research International*, 100, 566–571. doi: <https://doi.org/10.1016/j.foodres.2017.07.054>
12. Verboloz, E. I., Romanchikov, S. A. (2017). Features of the low-temperature heat treatment of meat products in a combi steamer with the imposition of ultrasonic vibrations. *Proceedings of the Voronezh State University of Engineering Technologies*, 79 (3), 35–41. doi: <https://doi.org/10.20914/2310-1202-2017-3-35-41>
13. Kanokruangrong, S., Birch, J., El-Din Ahmed Bekhit, A. (2019). Processing Effects on Meat Flavor. *Encyclopedia of Food Chemistry*, 302–308. doi: <https://doi.org/10.1016/b978-0-08-100596-5.21861-1>
14. Zahorulko, A., Zagorulko, A., Yancheva, M., Dromenko, O., Sashnova, M., Petrova, K. et. al. (2020). Improvement of the continuous “pipe in pipe” pasteurization unit. *Eastern-European Journal of Enterprise Technologies*, 4 (11 (106)), 70–75. doi: <https://doi.org/10.15587/1729-4061.2020.208990>
15. Zahorulko, A. M., Zahorulko, O. Ye. (2016). Pat. No. 108041 UA. Hnuchkyi plivkovy rezystyvnyi elektronahrivach vyprominiuiuchoho typu. No. u201600827; declared: 02.02.2016; published: 24.06.2016, Bul. No. 12. Available at: <http://uapatents.com/5-108041-gnuchkij-plivkovij-rezistivnij-elektronagrivach-viprominyuchogo-tipu.html>
16. *Sovremennaya tekhnologiya ohlazhdeniya elementom Pel'te*. Available at: https://algimed.com/pdf/binder/kb400/2013_02_wp_Peltier_RU.pdf
17. Liao, M., He, Z., Jiang, C., Fan, X., Li, Y., Qi, F. (2018). A three-dimensional model for thermoelectric generator and the influence of Peltier effect on the performance and heat transfer. *Applied Thermal Engineering*, 133, 493–500. doi: <https://doi.org/10.1016/j.applthermaleng.2018.01.080>
18. *Geometriya krasoty*. Pressovannye vetchiny. Available at: <http://www.meatbranch.com/publ/view/99.html>
19. Kiptelaya, L., Zagorulko, A., Zagorulko, A. (2015). Improvement of equipment for manufacture of vegetable convenience foods. *Eastern-European Journal of Enterprise Technologies*, 2 (10 (74)), 4–8. doi: <https://doi.org/10.15587/1729-4061.2015.39455>
20. Huang, L., Bai, L., Zhang, X., Gong, S. (2019). Re-understanding the antecedents of functional foods purchase: Mediating effect of purchase attitude and moderating effect of food neophobia. *Food Quality and Preference*, 73, 266–275. doi: <https://doi.org/10.1016/j.foodqual.2018.11.001>